

FEATURE

- Aluminum housing with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Aluminum mounting plate allows top, back or end mount.
- Removable directional indicators.
- 120V/277VAC Dual voltage operation.
- Letter 6" height with 3/4" stroke. Super bright RED or GREEN LED lamps.
- Optional white or silver mylar.
- Built-in 3.6V600mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

FAMILY: **JELEX**

NOTES:

TYPE: **LED EDGE-LIT EMERGENCY EXIT SIGN**



CEC DOE FC




ORDERING INFORMATION

FAMILY	FACEPLATE	LENS	PANEL
JELEX	1(SINGLE)	R(RED)	C(CLEAR)
	2(DOUBLE)	G(GREEN)	W(WHITE)
			M(MIRROR)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JELEX1RC	38x37x30.5cm/6pcs	9.8/9.0kgs
JELEX1GC	38x37x30.5cm/6pcs	9.8/9.0kgs
JELEX2RM	38x37x30.5cm/6pcs	9.8/9.0kgs
JELEX2GM	38x37x30.5cm/6pcs	9.8/9.0kgs
JELEX2RW	38x37x30.5cm/6pcs	9.8/9.0kgs
JELEX2GW	38x37x30.5cm/6pcs	9.8/9.0kgs

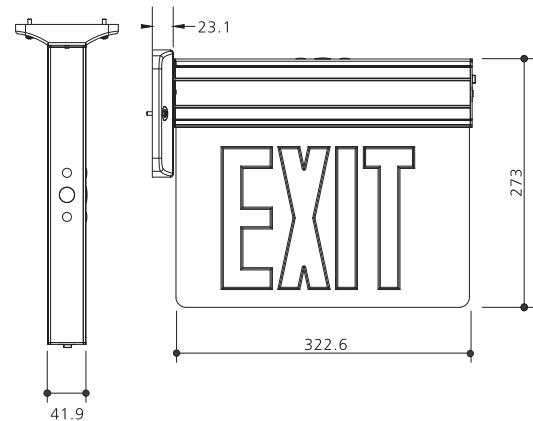

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JELEX1RC	120/277V	0.027-0.013A	3.5W	12Pcs Red LEDs	24 Hrs	180 Mins
JELEX1GC	120/277V	0.027-0.013A	3.5W	12Pcs Green LEDs	24 Hrs	180 Mins
JELEX2RM	120/277V	0.027-0.013A	3.5W	12Pcs Red LEDs	24 Hrs	180 Mins
JELEX2GM	120/277V	0.027-0.013A	3.5W	12Pcs Green LEDs	24 Hrs	180 Mins
JELEX2RW	120/277V	0.027-0.013A	3.5W	12Pcs Red LEDs	24 Hrs	180 Mins
JELEX2GW	120/277V	0.027-0.013A	3.5W	12Pcs Green LEDs	24 Hrs	180 Mins

LED EDGE-LIT EMERGENCY EXIT SIGN

JELEX