

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

FAMILY: **JEE2**

NOTES:

TYPE: **NEW COMPACT SIZE LED EXIT SIGN**



CEC DOE FC




ORDERING INFORMATION

| FAMILY | LENS | HOUSING COLOR |
|--------|-------------------|---------------|
| JEE2 | R(RED) | BLANK(WHITE) |
| | G(GREEN) | B(BLACK) |
| | TYPE | LETTER |
| | BLANK(AC ONLY) | BLANK(EXIT) |
| | E(BATTERY BACKUP) | SA(SALIDA) |

PACKING INFORMATION

| MODEL NO. | PACKING INFORMATION | WEIGHTS |
|-------------------|---------------------|------------|
| JEE2RWE | 40x33x23cm/6pcs | 6.2/5.7kgs |
| JEE2GWE | 40x33x23cm/6pcs | 6.2/5.7kgs |
| JEE2RW AC ONLY | 40x33x23cm/6pcs | 6.0/5.5kgs |
| JEE2GW AC ONLY | 40x33x23cm/6pcs | 6.0/5.5kgs |

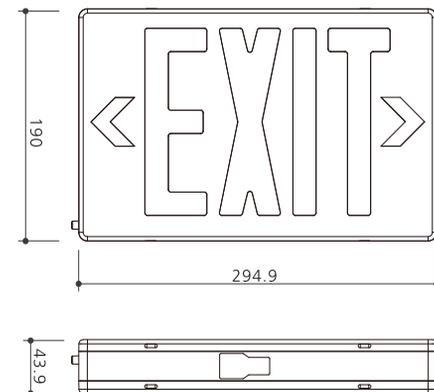

ELECTRICAL INFORMATION

| MODEL | RATED VOLTAGE | INPUT CURRENT | INPUT WATT | LED TYPE | CHARGING TIME | EMERGENCY RUN TIME |
|-----------|---------------|---------------|------------|-----------------|---------------|--------------------|
| JEE2RW | 120/277V | 0.015/0.008A | 1.9W | 12Pcs Red LEDs | 24 Hrs | 90 Mins |
| JEE2GW | 120/277V | 0.015/0.008A | 1.9W | 6Pcs Green LEDs | 24 Hrs | 90 Mins |
| JEE2RWE | 120/277V | 0.020/0.020A | 1.8W | 12Pcs Red LEDs | 24 Hrs | 90 Mins |
| JEE2GWE | 120/277V | 0.020/0.020A | 1.8W | 6Pcs Green LEDs | 24 Hrs | 90 Mins |
| JEE2GW-SA | 120/277V | 0.015/0.008A | 1.9W | 6Pcs Green LEDs | 24 Hrs | 90 Mins |